
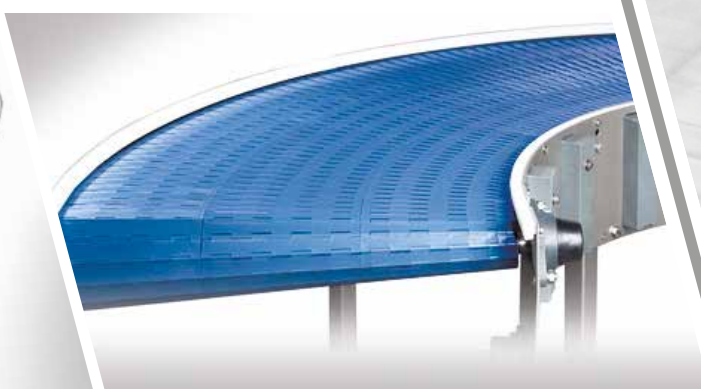


NUOVE CURVE MODULARI

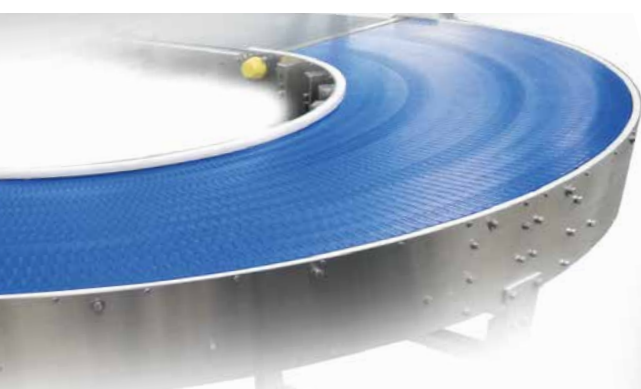

APPLICAZIONI


- Industrie logistiche e centri di distribuzione
- Produzione di cemento, piastrelle e mattoni
- Industrie per lavorazione di legno
- Condizioni ostili e applicazioni pesanti

CARATTERISTICHE

- Adatto a trasportare prodotti larghi e pesanti
- Design sicuro (struttura interamente chiusa)
- Ottima resistenza chimica
- Alta resistenza all'abrasione
- Bassa rumorosità
- Soluzione a secco

PRODOTTI TRASPORTATI

- Casse in plastica e legno
- Scatole di cartone
- Polybag
- Confezioni termoretraibili
- Piastrelle e mattoni
- Pannelli in legno

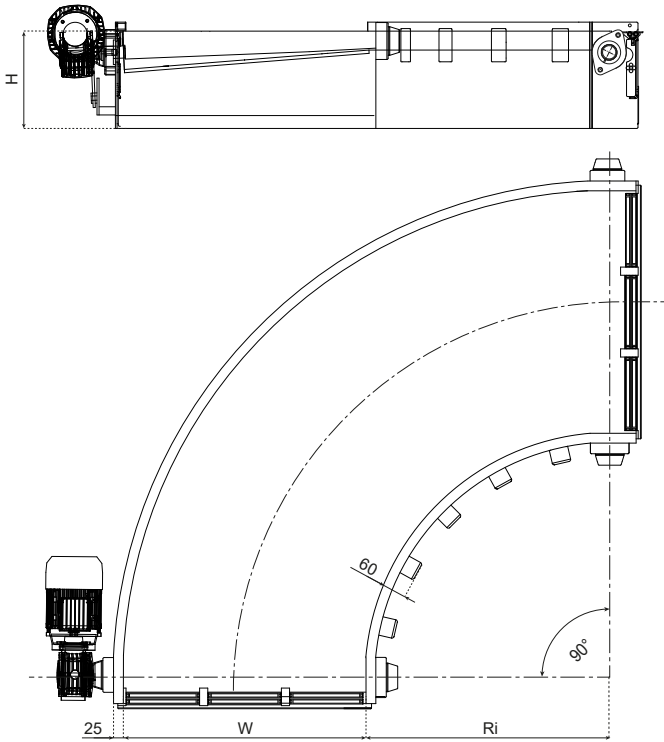

INFORMAZIONI GENERALI

- Design compatto in relazione alla larghezza (raggi di curvatura ridotti anche con curve molto larghe).
- Massimo controllo del prodotto trasportato.
- Tratti rettilinei ridotti per trasferire facilmente il prodotto.
- Alta resistenza a prodotti pesanti.
- Alta velocità lineare.
- Minima manutenzione necessaria.

DETTAGLI

Carico massimo di lavoro 250Kg/m (2450 N/m).
 Velocità massima sul raggio interno Ri: 60 m/min.
 Angoli disponibili da 30° a 180°.
 Larghezza utile (W) da 200 mm a 1600 mm.
 Raggio interno (Ri) da 500 mm a 2000 mm.
 Altezza telaio (H) 235/275 mm.
 Telaio in acciaio inox.
 Materiale del tappeto a basso attrito - colore blu.

ANGOLO	RAGGIO INTERNO (Ri) mm	LARGHEZZA UTILE (W) mm
90°	500	300, 500, 700, 900, 1100, 1300, 1500
	600	200, 400, 600, 800, 1000, 1200, 1400, 1600
	800	200, 400, 600, 800, 1000, 1200, 1400
	1000	200, 400, 600, 800, 1000, 1200
	1200	200, 400, 600, 800, 1000
	1400	200, 400, 600, 800
	1600	200, 400, 600
	1800	200, 400
	2000	200

ANGOLO	RAGGIO INTERNO (Ri) mm	LARGHEZZA UTILE (W) mm
180°	500	300, 500, 700, 900, 1100, 1300, 1500
	600	200, 400, 600, 800, 1000, 1200, 1400, 1600
	800	200, 400, 600, 800, 1000, 1200, 1400
	1000	200, 400, 600, 800, 1000, 1200
	1200	200, 400, 600, 800, 1000
	1400	200, 400, 600, 800
	1600	200, 400, 600
	1800	200, 400
	2000	200

Disponibili con piastre di trasferimento a rulli

SYSTEM PLAST®

System Plast s.r.l.

Via Guareschi, 2
 Telgate, 24060 - Italy

Customer Service: 035-83-51-301

Fax: 035-83-51-399

www.regalbeloit.com

APPLICATION CONSIDERATIONS

The proper selection and application of power transmission products and components, including the related area of product safety, is the responsibility of the customer. Operating and performance requirements and potential associated issues will vary appreciably depending upon the use and application of such products and components. The scope of the technical and application information included in this publication is necessarily limited. Unusual operating environments and conditions, lubrication requirements, loading supports, and other factors can materially affect the application and operating results of the products and components and the customer should carefully review its requirements. Any technical advice or review furnished by Regal Beloit America, Inc. and/or its affiliates ("Regal") with respect to the use of products and components is given in good faith and without charge, and Regal assumes no obligation or liability for the advice given, or results obtained, all such advice and review being given and accepted at customer's risk.

For a copy of our Standard Terms and Conditions of Sale, please visit <http://www.regalbeloit.com> (please see link at bottom of page to "Standard Terms and Conditions of Sale"). These terms and conditions of sale, disclaimers and limitations of liability apply to any person who may buy, acquire or use a Regal product referred to herein, including any person who buys from a licensed distributor of these branded products.

Regal and System Plast are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2018 Regal Beloit Corporation, All Rights Reserved. MCSSP180501 • Form# 102151

